

Wall Mounting Speaker


DESCRIPTION

The speaker units of the WPS range featuring a refined and modern design and ideal for both background music and speech, have been designed specifically for schools, hospitals, waiting rooms, hotels, shops, offices and restaurants. They can be either wall-mounted or ceiling-mounted. The housing is made of white self-extinguishing ABS (UL94-V0) with a metal front grille. Each unit has a ceramic terminal block and a thermal fuse. The bi-directional WSP 406TB/EN speaker units is suitable in particular for installing in transit areas and corridors.

TECHNICAL SPECIFICATIONS

Code		40958
Fullrange driver	inch	2 x 2.5
Rated power	W	6 (3 + 3)
Adjustable power	W	6 / 3 / 1.5
Line voltage	V	50 / 70 / 100
Sensitivity (@1W/1m)	dB	86
MAX SPL (pnom/1m)	dB	93
Frequency response	Hz	130 - 14k
Horizontal angle of dispersion (-6dB)	(4kHz)	150°
Net dimensions (WxHxD)	mm	258 x 169 x 72
	inch	10.15 x 6.65 x 2.83
Net weight	kg	0.78
	lb	1.71

DIMENSIONAL DRAWING

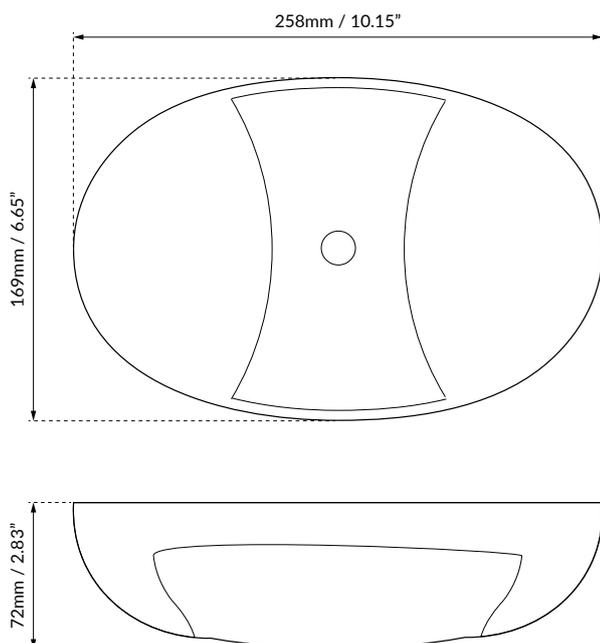

EN 54-24:2008

EN 54-24:2008
Cert. Nr. 0068-CPR-040/2013

Declaration of Performance (DoP)
 available on the website: www.fbt.it

DIAGRAMS

