

VHA-B 406 | Metal Base

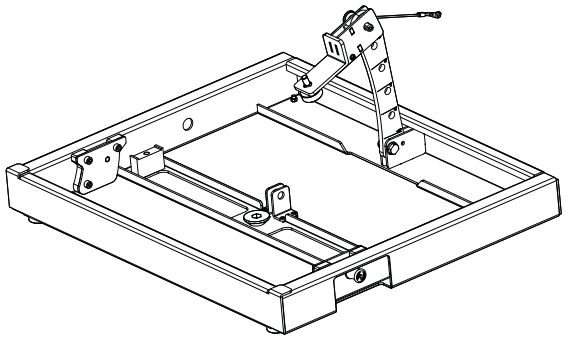

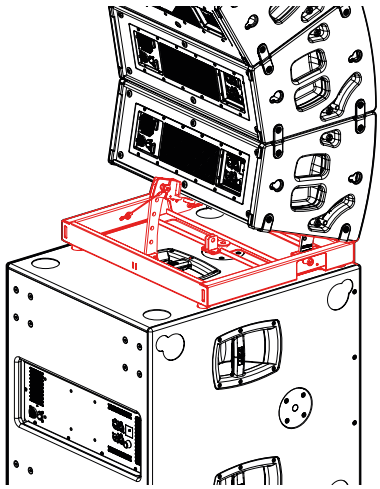

TECHNICAL SPECIFICATIONS

GENERAL

Code	Black	41783
	White	---
Name		VHA-B 406
Description		Metal Base
MAX n° of speaker		2 ground stack / 3 on SUB


MECHANICAL SPECIFICATIONS

Material		Steel
Net dimensions (WxHxD)	mm	606 x 270 x 502
	inch	23.85 x 10.63 x 19.76
Net weight	kg	10.30
	lb	22.70

COMPATIBLE PRODUCTS

HORIZON VHA Series		112S - 112SA - 112SN/SND 118S - 118.2A - 118SN/SND 406 - 406A - 406N/ND

DIMENSIONAL DRAWING

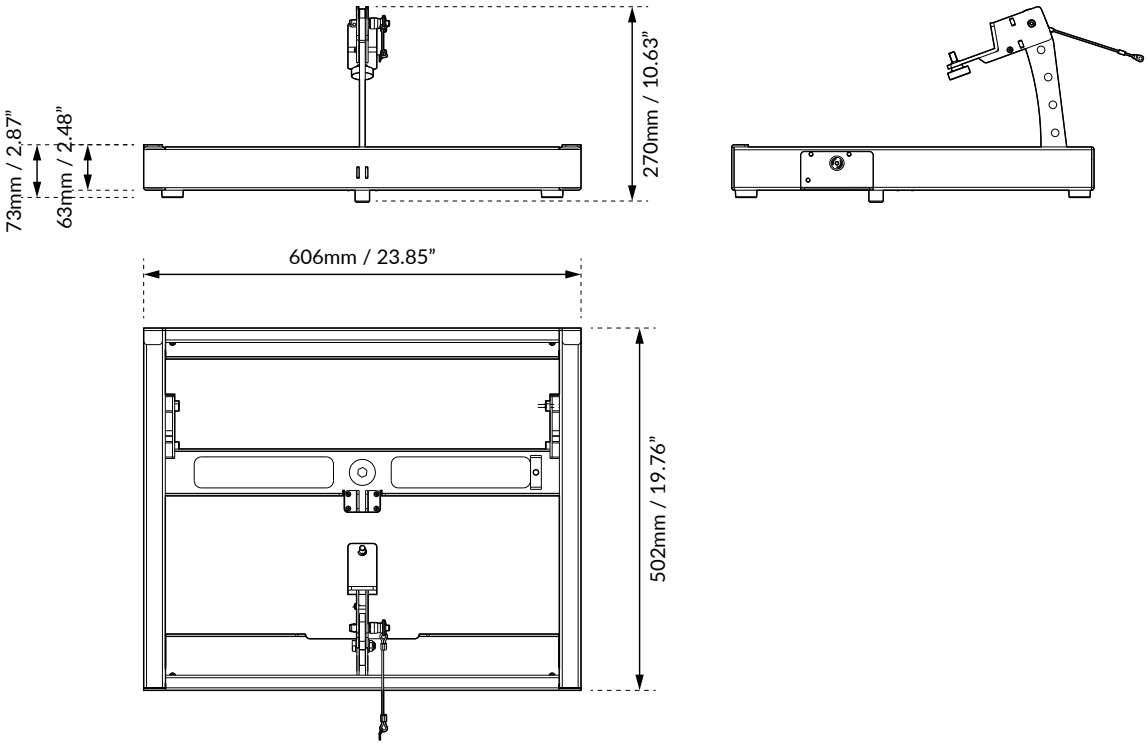

WARNING

The installation of FBT acoustic speakers, using the suspension accessories described in this manual and the specific installation instructions, must be carried out exclusively by qualified personnel, in full compliance with the rules and safety standards in force in the country where the installation takes place. FBT suspension accessories are designed exclusively for use with FBT systems and must not be used in combination with any other speaker or device. Every element of the ceiling, wall, or other support where a FBT system is installed or suspended must be capable of safely supporting the load. All speakers installed in workplaces and/or entertainment venues must, in addition to the main suspension system, be equipped with an independent secondary safety system with adequate load capacity. For fixed installations, regular and specific inspections must always be planned and carried out to verify all components that ensure the long-term safety of the system.

- FBT speakers must be suspended only using original accessories.
- When selecting the installation location, suspension cables, and mounting supports, ensure that all components are capable of supporting the combined weight of the speaker and suspension accessories with an appropriate safety factor.
- For fixed installations, always schedule and perform regular inspections to verify all components that ensure the long-term safety of the system.
- Never suspend the speakers using the handles; the handles are designed for transporting the speaker, not for suspension.
- Never hang onto or cling to the speaker when it is suspended.

WARNING | *When suspending FBT models, use only FBT mounting supports. The use of other mounting supports may cause dangerous instability, potentially resulting in harm to people or property.*

WARNING | *To prevent harm to people or property, it is essential to equip the system with the provided safety cables when the speaker is wall-mounted. Carefully select the installation area and ensure that the supporting structure is adequate to bear the weight of the speaker.*

WARNING | *FBT ELECTRONICA SpA is not responsible for any damage to persons or property resulting from failure to comply with these instructions or failure to verify the safety factor of all components involved in suspending the system.*

INSTALLATION VHA-B 406

In ground stack configuration on the ground or on subwoofer:

- Use the VHA-B 406 base to be placed above the sub or the VHA-T 406 base on the ground.
- The flange “G”, to be positioned on the back of the speaker, provides greater support and safety to the modules that are part of the system.
- To fix and tilt the first module to the VHA-B 406 base and to that of the other modules, proceed as described in the previous pages.
- Once the desired degree of inclination has been chosen, the module will automatically position itself to be anchored to the base by means of the flange “L”; use the safety pin “H” for definitive locking.

WARNING | *Always make sure that all the pins are fully inserted and locked at the end of assembly.*

